# LED Emergency Spotfire Lights

## Key Features

- Long-life 3W LED: 50,000 Hours (AVG).
- 3-Years Manufacturer Warranty on the Complete Fitting
- Compliant with Australian Standards AS2293.3:2005
- Emergency Classification C0/D40
- High-Quality Safety Oriented Design

## Recess Mount

### White Fitting



Model: **SP3LED**
Mount: Recess
Colour: White
View Online

### Black Fitting



Model: **SP3LED-BLK**
Mount: Recess
Colour: Black
View Online

## Surface Mount

### White Fitting



Model: **SP3LEDC**
Mount: Surface
Colour: White
View Online

# Specifications

### General

**Body:** White Powder Coated Steel Body

**Rated Voltage: 220~**240VAC

**Operating Temperature:** 0~40°C

**Terminal:** 3 Pins Main Power Plug

### Illumination

**Tube Type:** LED

**Tube AVG Life-Span:** 50,000 hours

**Colour Temperature:** 5,000K

**Beam Angle:** 110°C

**CRI:** 80

### Battery

**Cell:** Ni-Cd AA 1,500mAh

**Charge Time:** 16 Hours

**Discharge Time:** 2 Hours

**Max Tempurature:** 70°C

| Model No.: | Wattage | C0 Classification | Height (mm) | Width (mm) | Length (mm) |
|---|---|---|---|---|---|
| SP3LED | 2.5W | D40 | 80 | 165 | 230 |
| SP3LED-BLK | 2.5W | D40 | 80 | 165 | 230 |
| SP3LEDC | 2.5W | D40 | 63 | 250 | 260 |

# Spacing Requirements

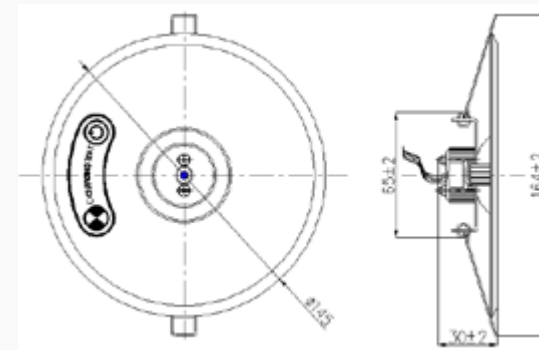| | Mounting Height (m) | | | | | | | | | | | | | | |
| | 2.1 | 2.4 | 2.7 | 3 | 3.3 | 3.6 | 4 | 4.5 | 5 | 6 | 7 | 8 | 9 | 10 | 15 | 20 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Classification | Maximum Spacing (m) | | | | | | | | | | | | | | | |
| **D40** | 16.7 | 17.4 | 18.0 | 18.6 | 19.1 | 19.6 | 20.1 | 20.8 | 21.3 | 22.1 | 22.7 | 23.0 | 23.1 | 23.1 | | |

# Warranty Information

WBS Technology LED emergency lighting products come with a 3-year manufacturer's warranty. All warranty information and conditions can be found on the WBS website:

wbstech.com.au/warranty-statement/

# Installation Instructions

Please ensure all electrical work is conducted by a licensed electrician:

1. Connect the battery pack cable to the emergency Control unit.

2. Connect dish LED head cable to the emergency Control unit.

3. Plug the 3 pin power flexible lead (450mm length) into the power socket within the ceiling cavity.

4. Install the Spotfire dish on the ceiling Cut out: 70mm to 135mm.

# Contact Information

📞 **1300 927 533**

✉️ **info@wbstech.com.au**

# Locations

## Silverwater, NSW

**Address:** 32/2 Slough Ave,
Silverwater NSW 2128

**Open Hours:** 9:00am - 5:00pm
Monday - Friday

## Mount Waverley, VIC

**Address:** 66/170 Forster Rd,
Mount Waverley VIC 3149

**Open Hours:** 8:30am - 5:30pm
Monday - Friday

For more information or to obtain the digital version of this specification, please visit the WBS website:

**wbstech.com.au**